




Signaline FT-68

Fixed Temperature Linear Heat Detector

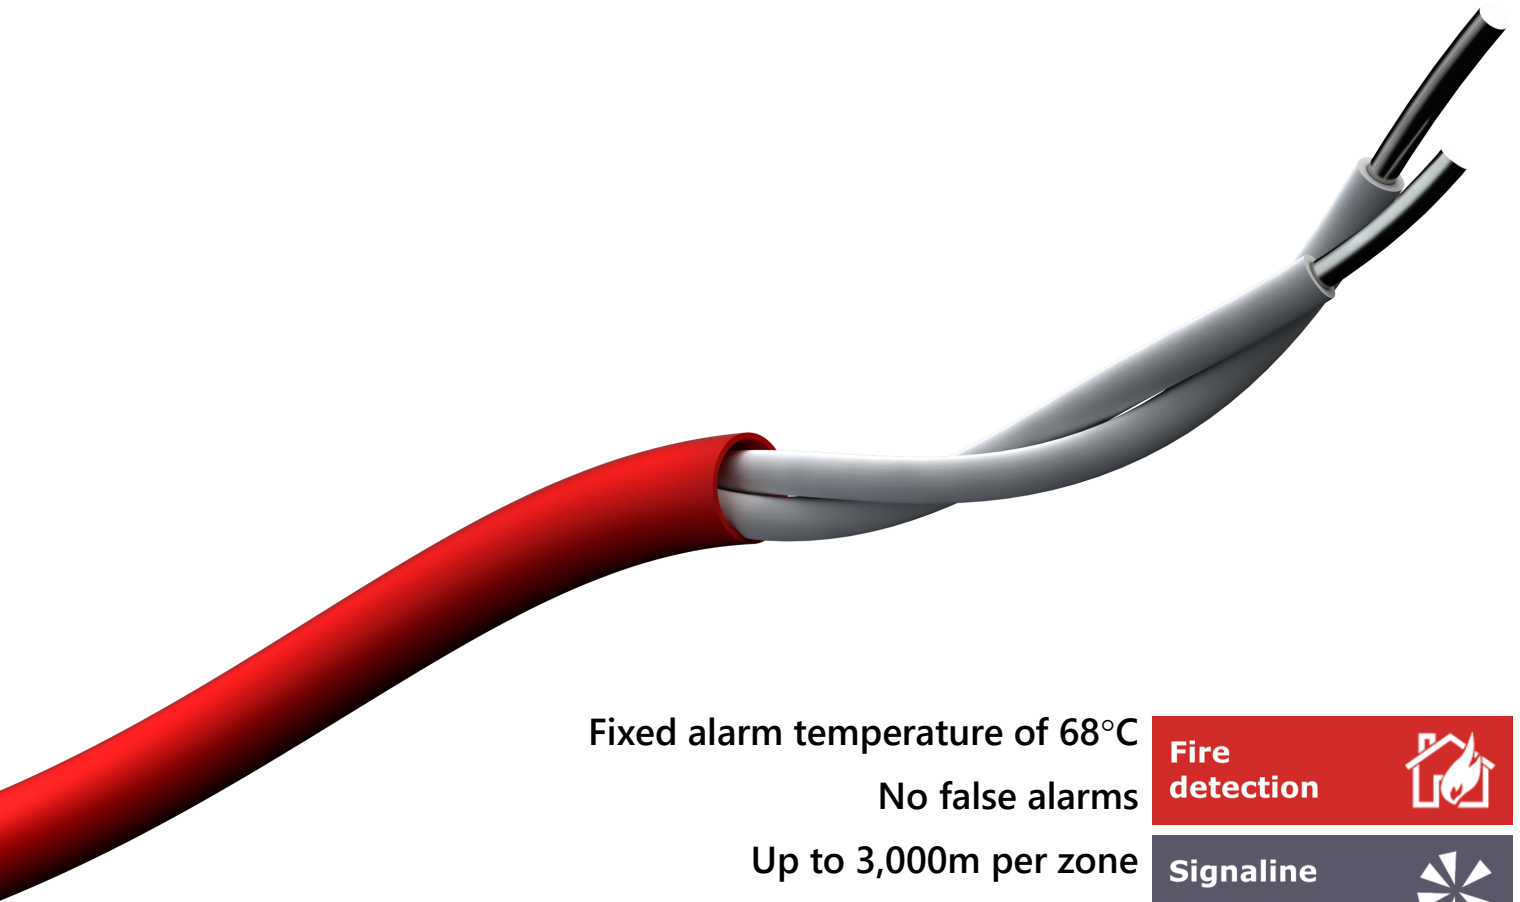

Fixed alarm temperature of 68°C

No false alarms

Up to 3,000m per zone

Multiple fixing options

Fire
detection



Signaline





Model	Signaline FT-68
Alarm temperature	68°C (155°F)
Max ambient temp.	45°C (113°F)
Min. ambient temp.	-40°C
Conductor resistance	0.1Ω/M or 0.029Ω/FT @20°C
Max voltage	42Vdc or 30Vac
Dielectric withstand (UL)	500Vdc
Tensile strength	1700 N/mm ²
Minimum bend radius	75mm
Overall diameter	3.5mm
Weight	13kg/500M
Outer sheath material	PVC
Colour	Red
Approvals	FM, UL, cUL, KFI


Signaline Fixed Temperature Linear Heat Detector (Signaline FT) can detect a build-up of heat anywhere along its length. When any point along the length of the cable reaches a predetermined temperature an alarm is initiated.

Signaline FT is available in multiple temperature settings and outer cover options, making the product suitable for use in a very wide range of applications.


Multiple fixing options and accessories are available.

Visit Signaline.com for our complete catalogue.


Conventional Systems



Addressable Systems

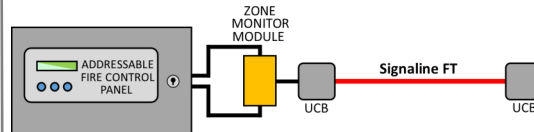

Hazardous Areas

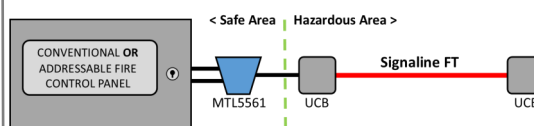

Compatible with the new
Signaline LocatorPlus
Dual Zone Monitor Module



Signaline FT cable is proudly
manufactured in the UK