




Signaline FT-105-R

Fixed Temperature Linear Heat Detector

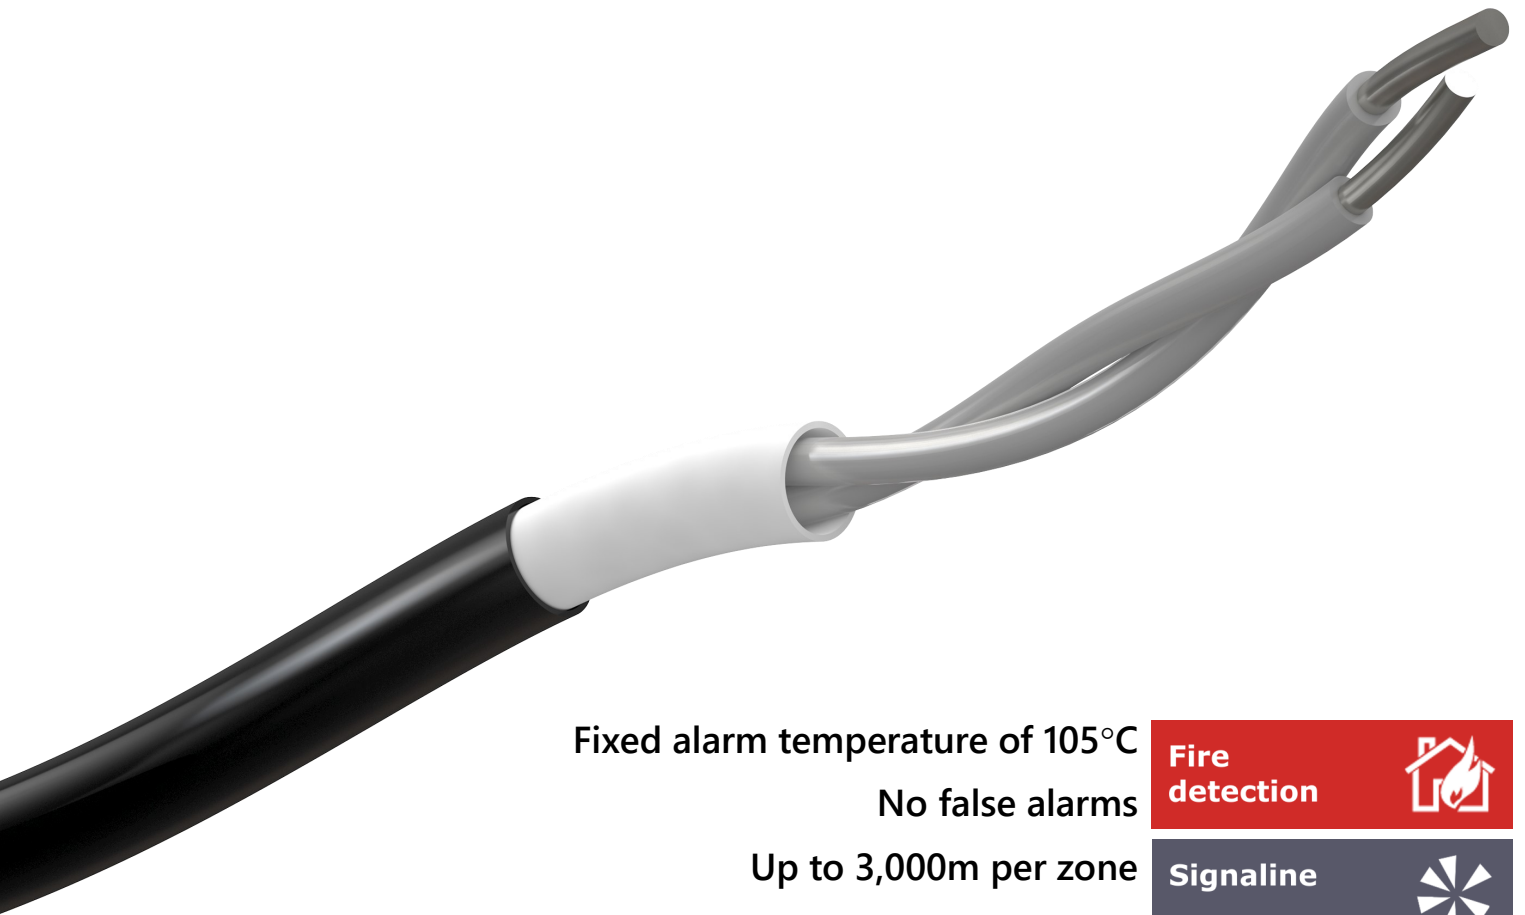

Fixed alarm temperature of 105°C

No false alarms

Up to 3,000m per zone

Protective nylon extrusion

Fire
detection



Signaline





Model	Signaline FT-105-R
Alarm temperature	105°C (220°F)
Max ambient temp.	85°C (185°F)
Conductor resistance	0.1Ω/M or 0.029Ω/FT @20°C
Max voltage	42Vdc or 30Vac
Dielectric withstand (UL)	500Vdc
Tensile strength	1700 N/mm ²
Minimum bend radius	75mm
Overall diameter	4.5mm
Weight	16kg/500M
Outer sheath material	Chemical resistant nylon
Colour	Black
Approvals	UL, cUL


Signaline Fixed Temperature Linear Heat Detector (Signaline FT) can detect a build-up of heat anywhere along its length. When any point along the length of the cable reaches a predetermined temperature an alarm is initiated.

Signaline FT is available in multiple temperature settings and outer cover options, making the product suitable for use in a very wide range of applications.


Multiple fixing options and accessories are available.

Visit Signaline.com for our complete catalogue.


Conventional Systems



Addressable Systems

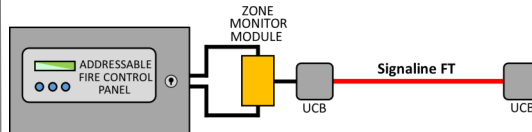

Hazardous Areas

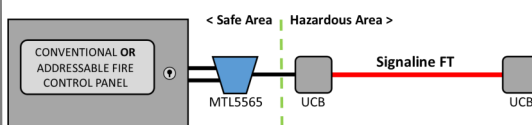

Compatible with the new
Signaline LocatorPlus
Dual Zone Monitor Module



Signaline FT cable is proudly
manufactured in the UK